

*phoenix*  
SAFE COMPANY LIMITED

# SS0313E DIONE

## OPERATING INSTRUCTIONS




*Phoenix Safe Company where peace of mind is guaranteed*


## PLEASE DO NOT KEEP THE EMERGENCY KEYS INSIDE YOUR SAFE!

Thank you for choosing our products! Every series of our safes is professionally made and designed to provide safety. Please take time to read and familiarise yourself with the operating instructions.

### MAIN COMPONENTS

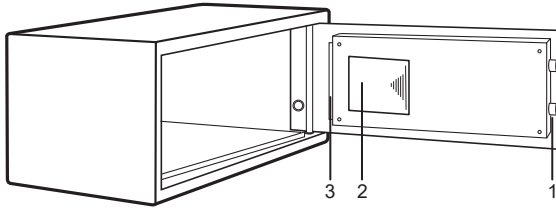

1. Bolts
2. Battery Compartment
3. LED Light
4. Display
5. Clearing Key
6. Locking Key
7. Emergency Key Cover
8. USB (for CEU)

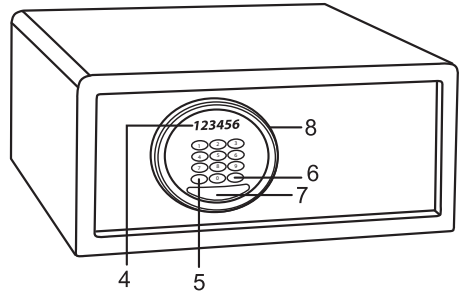

### POWER SUPPLY

#### Battery

4 x 1.5v AA Alkaline batteries are required to activate the lock (batteries not supplied). Used batteries should not be disposed of with normal domestic waste. These should be disposed of at approved collection points.



### USING PERSONAL CODE TO CLOSE AND OPEN THE SAFE

- Enter any 4 digit number then press the "LOCK" key, the word "CLOSED" appears and the safe will be closed
- Enter your 4 digit number then the word "OPENED" appears and the safe will be open.

### USING MASTER CODE TO OPEN THE SAFE

Press "LOCK" twice and "SUPER" appears, then input the master code "011223" (factory set code), the safe will be opened.

### CHANGING THE MASTER CODE

Keeping the door open, press "CLEAR" twice, and "PROG" will appear. Input "842627" + "LOCK", and "OLD" will appear. Input the old master code (Note: the original master code is "011223") + "LOCK", and "NEW" will appear. Input new 6 digit master code + "LOCK", and "GOOD" will appear; indicating the master code has been changed successfully.

### SETTING DATE AND TIME

Keep the door open, press "CLEAR" twice, and then input "055261" + "LOCK" then DATE will appear on the screen. And the clock-setting program starts

Data shown on the first screen:

YEAR		MONTH		DATE	
0	0	0	0	0	0

Example: press 150730 means July 30, 2015

YEAR		MONTH		DATE	
1	5	0	7	3	0

Then press "LOCK" to confirm.

Data shown on the second screen:

HOUR		MINUTE		SECOND	
0	0	0	0	0	0

Example: press 160130, means 16(h):01(m):30(s)

HOUR		MINUTE		SECOND	
1	6	0	1	3	0

Then press "LOCK" to confirm, and "GOOD" appears on the screen.

### OPENING THE SAFE IN AN EMERGENCY

If the codes are unknown or the batteries run low, you can access the safe using the emergency key provided. Insert the key and turn clockwise.

### READING OPENING RECORDS

This program can display the last 100 opening records. Keep the door open, press "CLEAR" twice + "162550" + "LOCK", then "RECORD" appears on the screen. The records will show in two screens.

The functional keys are as follows:

Press "5" to go to the latest opening record

Press "6" to show the time and method of opening

For example: July 30, 2015, 16:01 :30, opened the safe using the master code

The screen will show:

YEAR		MONTH		DATE	
1	5	0	7	3	0

Pressing "6" will show the following content.

HOUR		MINUTE		-----	OPENING METHOD
1	6	0	1	-----	2

### OPENING METHOD

"1": open the lock with the user code

"2": open the lock with the master code

"3": open the lock with the CEU

"4": open the lock with the emergency key

Press "4" to go back to the date

Press "8" to jump to the next record

Press "2" to go back to the previous record

Press "CLEAR" at any point to close this program



## **GUARANTEE REGISTRATION**

Please submit your guarantee registration by visiting our website [www.phoenixsafe.com](http://www.phoenixsafe.com) and clicking on guarantee registration. For further assistance or information please contact us on 0151 944 6444.  
APEX HOUSE, 1 ORRELL MOUNT, LIVERPOOL, L20 6NS, UNITED KINGDOM

## **Need support?**

**We're here if you need us.**

<b>Web</b>	<a href="http://www.phoenixsafe.co.uk">www.phoenixsafe.co.uk</a>
<b>Email</b>	<a href="mailto:info@phoenixsafe.co.uk">info@phoenixsafe.co.uk</a>
<b>Phone</b>	0151 944 6444

*Phoenix Safe Company where peace of mind is guaranteed*

Version 1.0