

ProFrostfri 10 self-regulating heating cable


Appliance:

ProFrostfri 10 self-regulating parallel heating cable (heating tape) can provide safe, reliable heat tracing for freeze protection or temperature maintenance of pipes, valves, flanges. It is suitable for use on small diameter plastic or metal pipes and instrument tubing in residential/light commercial and similar applications. ProFrostfri 10 is approved to be used both inside and outside the drinking water pipe.

Technical specification:

Nominal power rating:	10w/m
Nominal voltage heating cable:	230v
Dimension:	8.0 × 5.1mm
Max. operating temperature:	+65°C
Maximum intermittent exposure	+85°C
Temperature 1000 hours(power on or off)	
Min. installation temperature:	-40
Protective braid resistance	< 18.2Ω/km
Approval:	CE
Standard:	IEC 60800:2009

Construction:

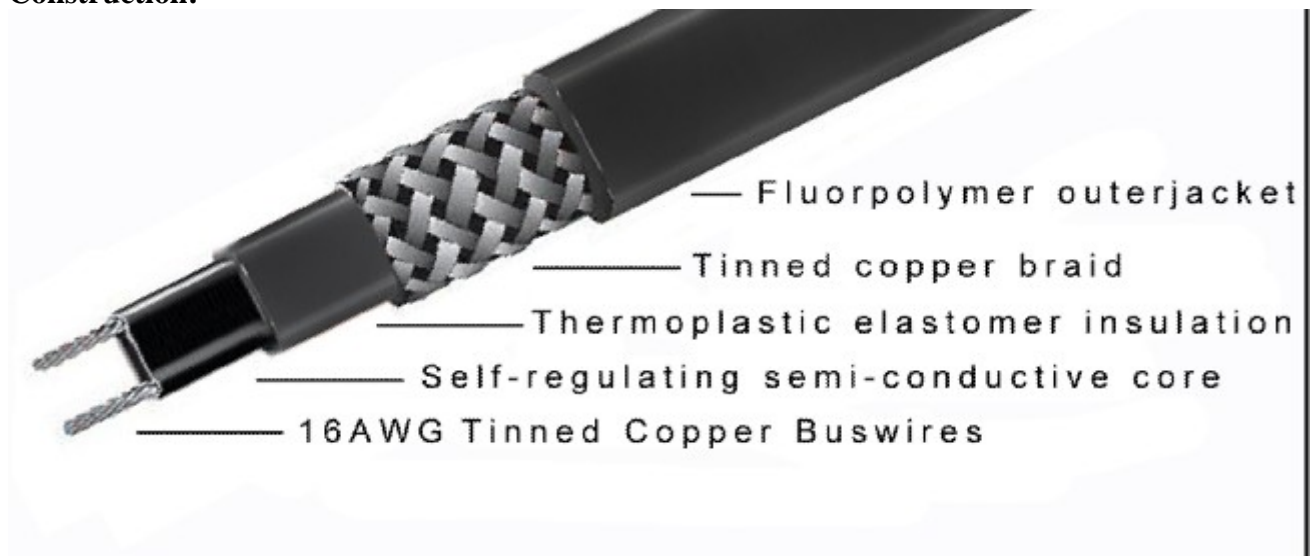

Post- og besøksadresse:
Dammyr 2C, 1605 Fredrikstad
E-post: post@profag.no

Telefon: +47 69 31 45 00
Telefaks: +47 69 31 45 01
Web: www.profag.no