


The DoorBird IP Door Chime is extremely versatile and aesthetically designed to fit in your home. The chime is an ideal addition to every DoorBird door station. It can be flexibly installed on a wall or the ceiling of your home. The connection of the door chime to the network can be made via WiFi or via network cable. The chime can also be powered conveniently via Power-over-Ethernet (PoE).

The network-based door chime is configured via the DoorBird App. In addition to the volume settings, you can also choose from a variety of ringtones. A DoorBird door station can be connected to an unlimited number of

door chimes and the door chime supports an unlimited number of door stations.

A separate ringtone can be assigned for every DoorBird door station. The door chime can also operate exclusively over the local area network (LAN), if the Internet has failed in the short term. In addition, a storey-call button can be connected to the door chime via two-wire cable and, an individual ringtone profile can be configured for this purpose. The resident always knows immediately if the doorbell was pushed at the main door or the apartment door



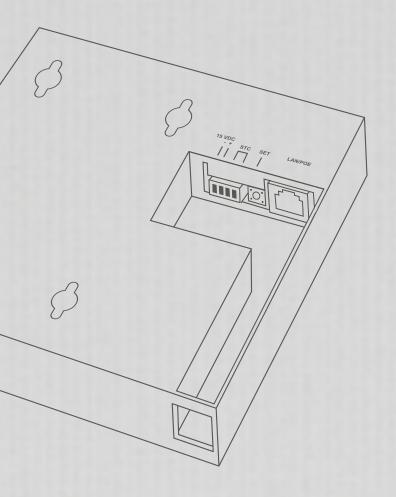

TECHNICAL SPECIFICATIONS	
Dimensions	125 x 119 x 26 mm (H x W x D) 4,92 x 4,68 x 1,02 in (H x W x D)
Power supply	15 V DC or Power over Ethernet (PoE 802.3af Mode-A)
Operating conditions	0 to +55°C / 32 to 131°F Relative Humidity 10 % to 85 % (non condensing)
Connectors	1 x RJ45 jack (10/100 Base-T) 4 x Screw terminal
Loudspeaker	102 dB
WiFi	2.4 GHz, 802.11 b/g/n, internal antenna
PoE	IEEE 802.3 af/at
Housing	Polycarbonate, UV-resistant
	Mobile Device: Newest iOS on iPhone/iPad, newest Android on Smartphone/Tablet
System requirements	Internet: High-Speed Landline Broadband Internet connection, DSL, Cable or fiber optic, no socks or Proxy server
	Network: 802.11 b/g/n 2.4 GHz or Ethernet Network, with DHCP
	Compatible with all DoorBird IP Video Door Stations.
Scope of delivery	1 x IP Door Chime 1 x Network Cable
	1 x Power supply unit (mains adaptor) with four country-specific adaptors (110 - 240 V AC to 15 V DC) 1 x Small parts 1 x Installation manual
Approvals	CE, FCC, IC, RoHS, IP50
Weight	200 g
EAN	4260423860353